




all solutions in one partner®

SCHEDA TECNICA - CODICE NF13



TASSELLO IN NYLON CON OCCHIOLO CHIUSO E RONDELLA

Muratura vuota e piena a soffitto.

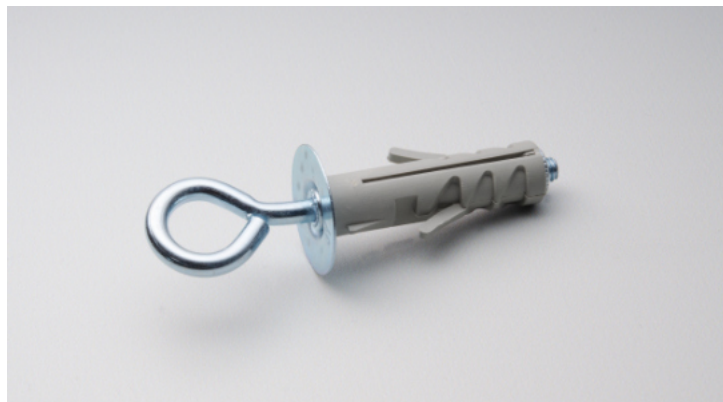

MATERIALI

Il tassello ad espansione - con collarino - è in nylon.
La vite è in acciaio con protezione in zinco contro la corrosione.



AVVERTENZE

- L'utilizzazione e il montaggio del prodotto è esclusivamente riservato al personale esperto.
- Il prodotto è monouso nel senso che le caratteristiche di durata stabilità e tenuta sono garantite per una singola applicazione e in nessun caso può essere riutilizzato in altre applicazioni;

TIPOLOGIE D'USO:

Si applica sui principali materiali edili, quali:

- Calcestruzzo;
- Mattone pieno;
- Mattone forato;
- Pietra naturale compatta.



SCHEDA TECNICA - CODICE NF13



all solutions in one partner®

INFORMAZIONI PRODOTTO

CODICE	PROFONDITÀ' MINIMA FORO [mm]	DIAMETRO [mm]	LUNGHEZZA [mm]	PZ / CONFEZIONE
NF13001	55	9	45	100 / 1200
NF13002	55	12	45	100 / 1200

DATI TECNICI - TEST DI ESTRAZIONE

CODICE	CALCESTRUZZO R250, MATTONE PIENO, MATTONE FORATO			
	VALORE DI ESTRAZIONE MAX.		VALORE DI ESTRAZIONE GARANTITO	
	[kgf]	[kN]	[kgf]	[kN]
NF13001	58	0,58	18	0,18
NF13002	58	0,58	18	0,18




all solutions in one partner®

DATA SHEET - CODE NF13



NYLON ANCHOR WITH EYELET SCREW AND WASHER

Solid and empty bricks for ceilings.

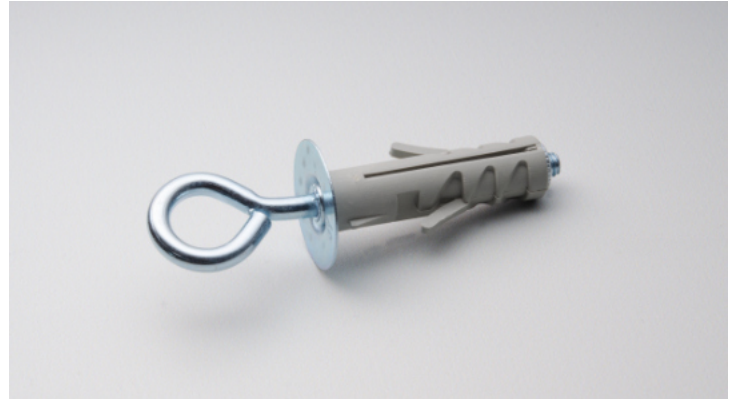

MATERIALS

The expansion plug - with collar - is in nylon.
The screw is in steel with zinc corrosion protection.



WARNINGS

- The use and assembly of the product is exclusively reserved for skilled staff;
- The product is single-use. That means its characteristics of durability, stability and tightness are guaranteed for a single application and in no case it may be reused in other applications;

APPLICATION:

It is applied to the main types of building materials, such as:

- Concrete;
- Solid brick;
- Hollow brick;
- Compact natural stone.



DATA SHEET - CODE NF13



all solutions in one partner®

PRODUCT INFO

CODE	MINIMUM DEPTH HOLE [mm]	DIAMETER [mm]	LENGTH [mm]	PCS. PER BOX
NF13001	55	9	45	100 / 1200
NF13002	55	12	45	100 / 1200

TECHNICAL DATA - EXTRACTION TEST

CODE	CONCRETE 250, SOLID BRICK, HOLLOW BRICK			
	MAX EXTRACTION VALUE		GUARANTEED EXTRACTION VALUE	
	[kgf]	[kN]	[kgf]	[kN]
NF13001	58	0,58	18	0,18
NF13002	58	0,58	18	0,18